





TECHNICAL DRAWING

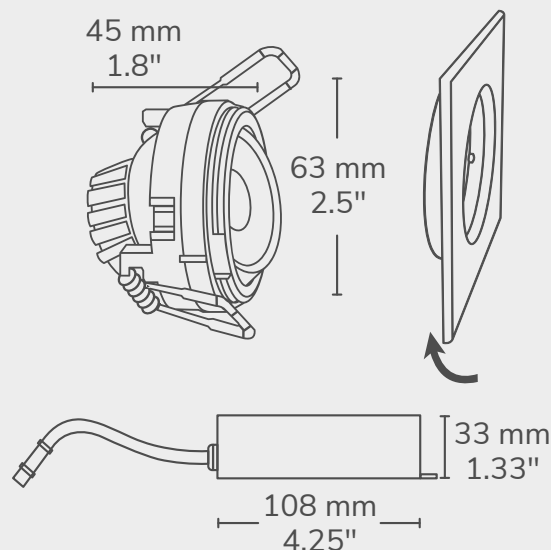

TECHNICAL SPECIFICATIONS

- Lumens : 784lm
- Color Temperature : 2700K / 3000K / 3500K / 4000K / 5000K Tunable
- Beam Angle : 40°
- CRI : >80
- Input Voltage : 110 - 130VAC
- Power : 8W
- Power Factor : >0.94
- Trim size : 3 & 4 inches interchangeable
- Trim color : White / Brushed Nickel / Black
- Dimming : Triac base dimmable
- IC Rated : Type IC Rated
- Location Approved : Damp Location
- Certification : cETLus
- Lifespan : 39,000hrs
- Warranty : 5 years
- 3" Cut out Size : 2.56" - 2.95" - (65 - 75mm)
- 4" Cut out Size : 3" - 4.25" - (78 - 108mm)

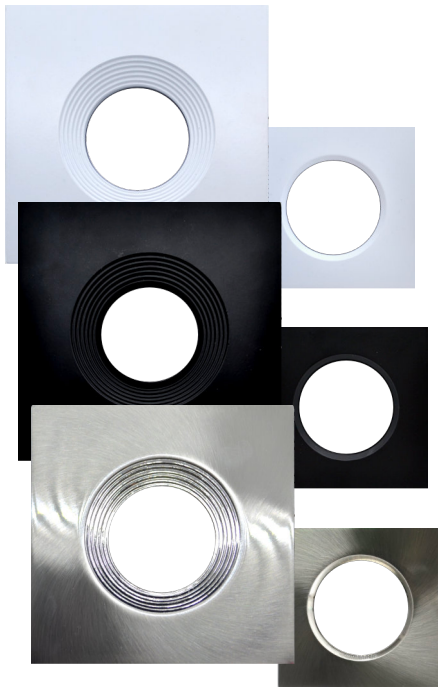

TRIM OPTIONS


Available trim options :

- White
- Black
- Brushed Aluminum

PRODUCT NUMBERS

White	3": LCDL-DLX3S-CCT-8W-WH 4": LCDL-DLX4S-CCT-8W-WH
Black	3": LCDL-DLX3S-CCT-8W-BK 4": LCDL-DLX4S-CCT-8W-BK
Brushed Aluminum	3": LCDL-DLX3S-CCT-8W-BN 4": LCDL-DLX4S-CCT-8W-BN

COLOR TEMPERATURE SETTINGS

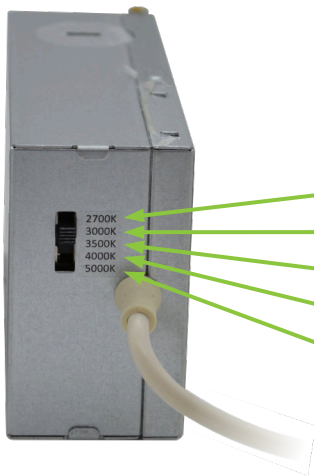


CCT is controlled by the toggle switch on junction box

- Toggle it to the upper position, the Light is set at 2700K
- Toggle it to the second position, the Light is set at 3000K
- Toggle it to the middle position, the Light is set at 3500K
- Toggle it to the fourth position, the Light is set at 4000K
- Toggle it to the lower position, the Light is set at 5000K

5 COLORS TEMPERATURE SETTINGS

WARM


COLD

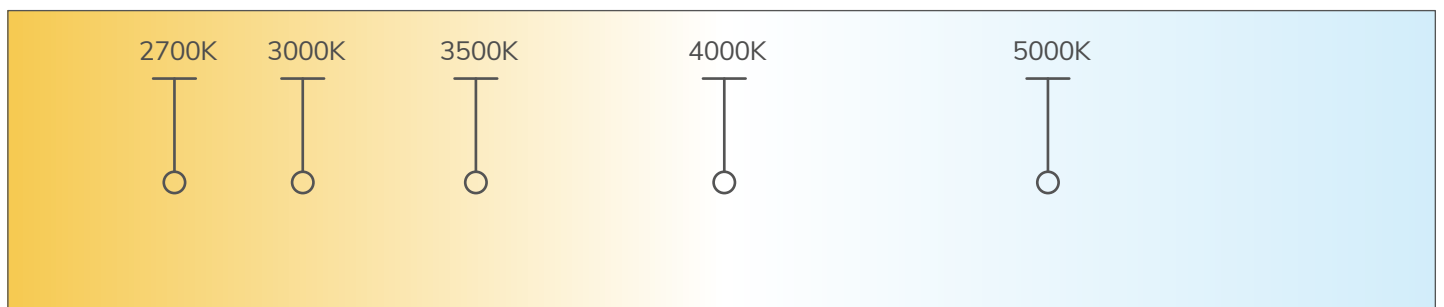


COMPATIBLE DIMMERS

BRAND	MODEL	DIMMING FUNCTION
Lutron	S-603P	DIMMABLE
Leviton	6633-P	DIMMABLE
Leviton	1C33L1	DIMMABLE
Lutron	CTCL-153P	DIMMABLE
Lutron	TG600P	DIMMABLE
Lutron	DV600P	DIMMABLE
Lutron	LG600P	DIMMABLE
Lutron	SCL-153P	DIMMABLE
Lutron	MAW-600	DIMMABLE
Lutron	MS-VP600G	N/A
Lutron	LGCL-153P	DIMMABLE
Lutron	7SCL-153P	DIMMABLE
Lutron	600PH	DIMMABLE
Lutron	DV-600P	DIMMABLE
Lutron	6838	DIMMABLE
Lutron	CTELV-303P	DIMMABLE
Lutron	CTCL-153PD	DIMMABLE
Leviton	6674	DIMMABLE

MOUNTING PLATES

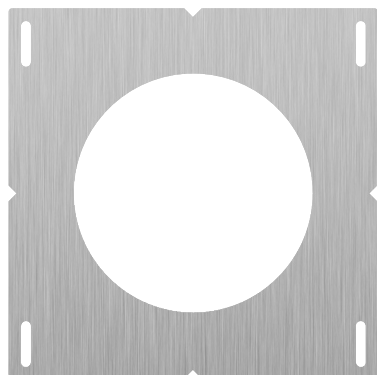

4 inch plate (LCPLATE-4)

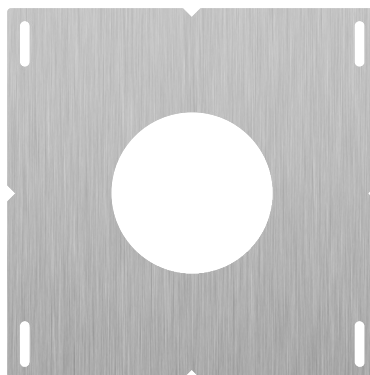

3 inch plate (LCPLATE-3)