

## DESCRIPTION

- TYPE: Back-Lit Mirror
- SHAPE: Rectangle
- Dimmable with any standard MLV / TRIAC dimmer wall switch
- CRI 90+
- IP Rating: 44
- 120V wiring
- Approx. 120,000 Hours Lifetime
- Complete UL and cUL Certification
- Hangs horizontally or vertically

## AVAILABLE LED COLORS (Kelvin)

3000K



6000K



Frosted glass



## MODELS AND SPECIFICATIONS

| MODELS                       | PRODUCT NUMBERS           | DIMENSIONS           | LUMENS        | WATTS | WEIGHT |
|------------------------------|---------------------------|----------------------|---------------|-------|--------|
| Frosted Re. Backlit 20 X 28  | LCMIR-REC-FB-2028-30/60K  | 20"W x 28"H x 1.6"D  | 3810/3910lm   | 33W   | 17lbs  |
| Frosted Re. Backlit 24 X 32  | LCMIR-REC-FB-2432-30/60K  | 24"W x 32"H x 1.6"D  | 4480/4490lm   | 41W   | 22lbs  |
| Frosted Re. Backlit 40 X 24  | LCMIR-REC-FB-4024-30/60K  | 40"W x 24"H x 1.6"D  | 5440/5450lm   | 49W   | 26lbs  |
| Frosted Re. Backlit 40 X 36  | LCMIR-REC-FB-4036-30/60K  | 40"W x 36"H x 1.6"D  | 6410/6430lm   | 58W   | 39lbs  |
| Frosted Re. Backlit 36 X 36  | LCMIR-REC-FB-3636-30/60K  | 36"W x 36"H x 1.6"D  | 5930/5940lm   | 54W   | 39lbs  |
| Frosted Re. Backlit 48 X 28  | LCMIR-REC-FB-4828-30/60K  | 48"W x 28"H x 1.6"D  | 6410/6430lm   | 58W   | 36lbs  |
| Frosted Re. Backlit 48 X 36  | LCMIR-REC-FB-4836-30/60K  | 48"W x 36"H x 1.6"D  | 7620/7830lm   | 65W   | 51lbs  |
| Frosted Re. Backlit 55 X 28  | LCMIR-REC-FB-5528-30/60K  | 55"W x 28"H x 1.6"D  | 7620/7830lm   | 65W   | 42lbs  |
| Frosted Re. Backlit 42 X 42  | LCMIR-REC-FB-4242-30/60K  | 42"W x 42"H x 1.6"D  | 7620/7830lm   | 65W   | 51lbs  |
| Frosted Re. Backlit 60 X 36  | LCMIR-REC-FB-6036-30/60K  | 60"W x 36"H x 1.6"D  | 8280/8510lm   | 71W   | 60lbs  |
| Frosted Re. Backlit 70 X 32  | LCMIR-REC-FB-7032-30/60K  | 70"W x 32"H x 1.6"D  | 8930/9180lm   | 76W   | 62lbs  |
| Frosted Re. Backlit 79 X 30  | LCMIR-REC-FB-7930-30/60K  | 79"W x 30"H x 1.6"D  | 9920/9940lm   | 90W   | 67lbs  |
| Frosted Re. Backlit 70 X 45  | LCMIR-REC-FB-7045-30/60K  | 70"W x 45"H x 1.6"D  | 9920/9940lm   | 90W   | 82lbs  |
| Frosted Re. Backlit 85 X 40  | LCMIR-REC-FB-8540-30/60K  | 85"W x 40"H x 1.6"D  | 10890/10910lm | 98W   | 93lbs  |
| Frosted Re. Backlit 100 X 45 | LCMIR-REC-FB-10045-30/60K | 100"W x 45"H x 1.6"D | 12830/12860lm | 116W  | 121lbs |



### COLOR RENDERING INDEX

The color rendering index (CRI) of a light source is a quantitative measure of its ability to reproduce the colors of various objects faithfully in comparison with an ideal or natural light source.

In general terms, CRI is a measure of a light source's ability to show object colors "realistically" or "naturally".

We only use LED CRI 90+.

### COLOR TEMPERATURE

We offer 2 different light colors for our mirrors.


6000K: Pure white color light. It is the most popular color for makeup application and hairstyling.

In addition, the 6000K is 15% brighter than the 3000K light color. 85% of our customers choose the 6000K light color.


3000K: Warm white color light, the light is a little yellow.




FROSTED RECTANGLE BACKLIT 20 X 28

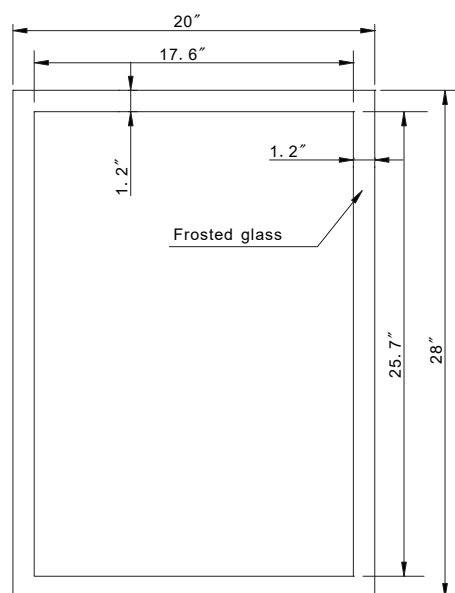

FRONT VIEW

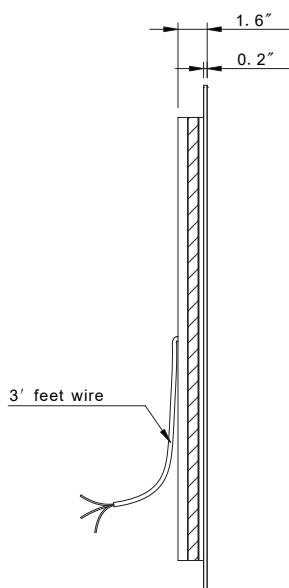


LEFT SIDE

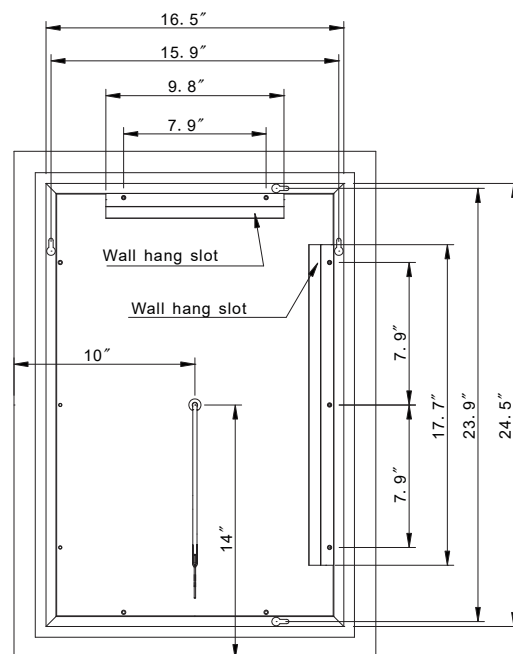


REAR VIEW


## FROSTED RECTANGLE BACKLIT 24 X 32

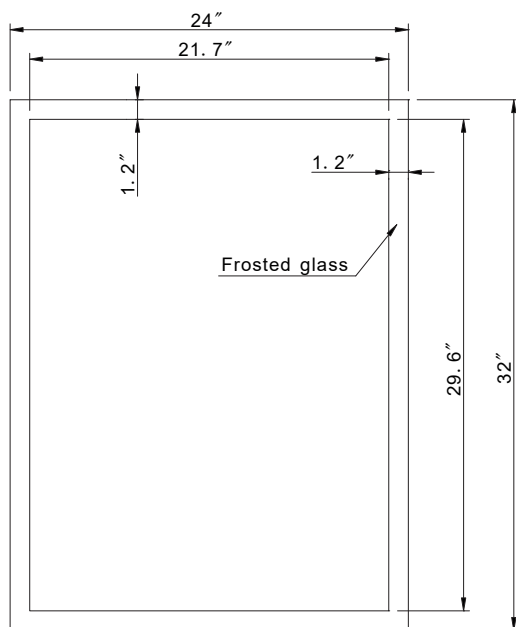

FRONT VIEW

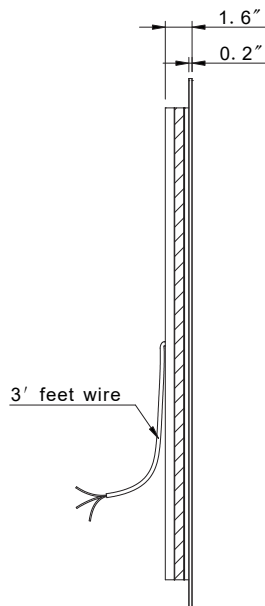


LEFT SIDE

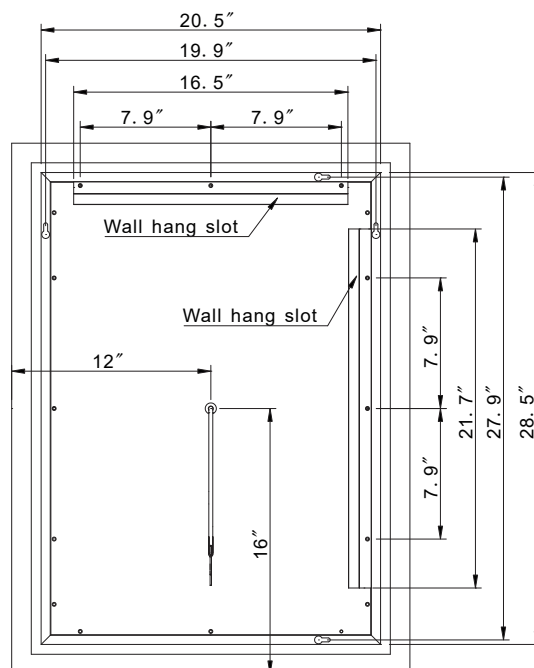


REAR VIEW


FROSTED RECTANGLE BACKLIT 40 X 24

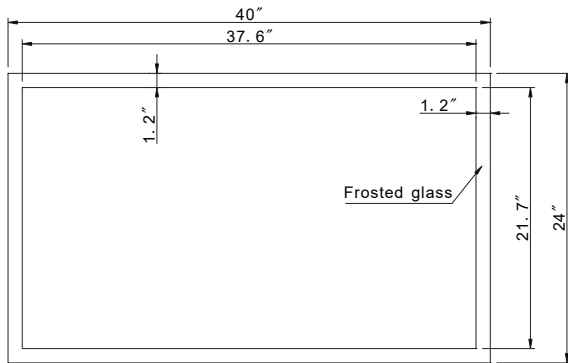

FRONT VIEW

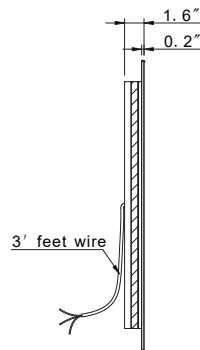


LEFT SIDE

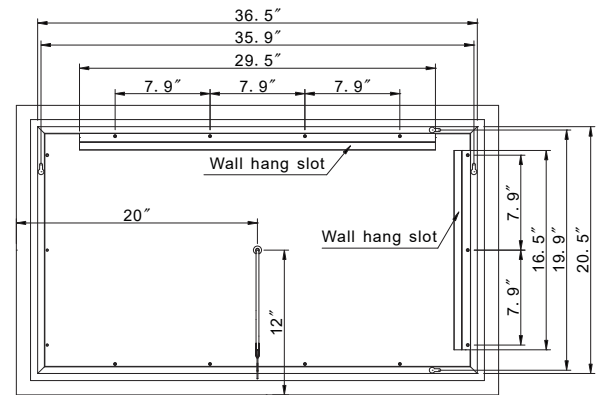


REAR VIEW


FROSTED RECTANGLE BACKLIT 40 X 36

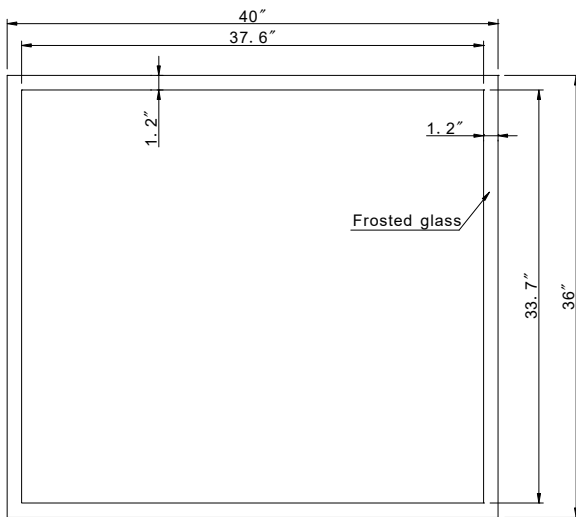

FRONT VIEW

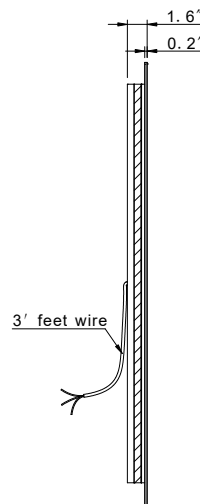


LEFT SIDE

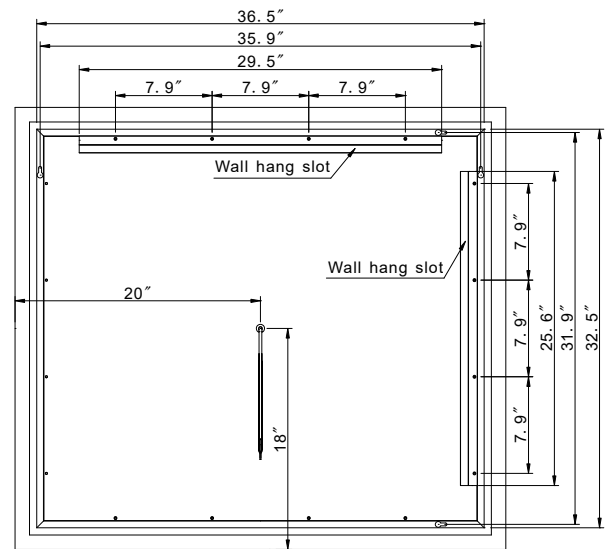


REAR VIEW


FROSTED RECTANGLE BACKLIT 36 X 36

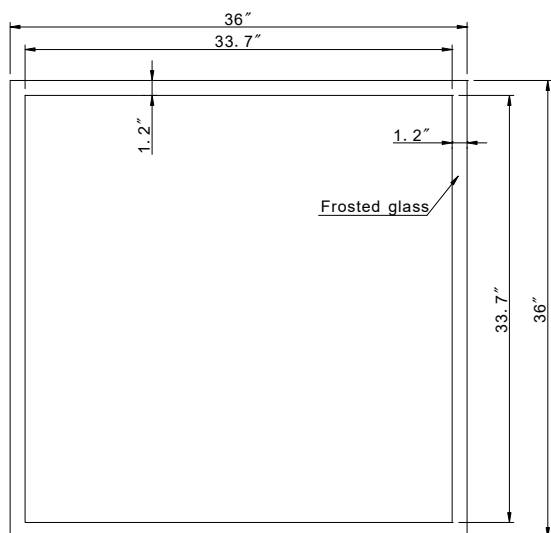

FRONT VIEW

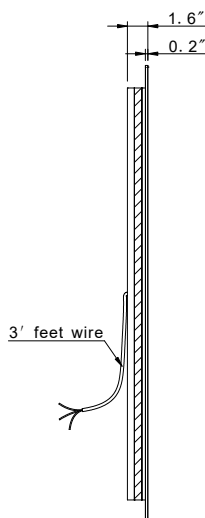


LEFT SIDE

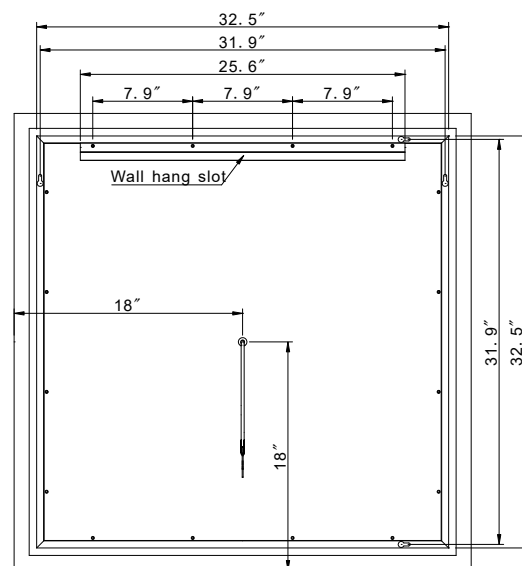


REAR VIEW


FROSTED RECTANGLE BACKLIT 48 X 28

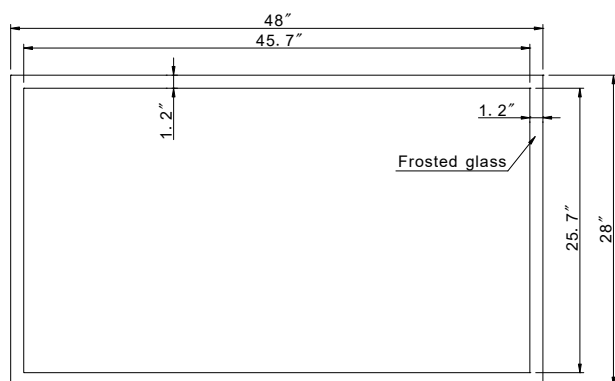

FRONT VIEW

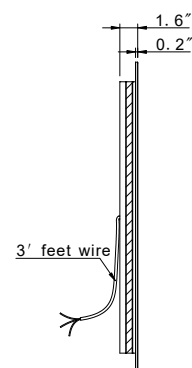


LEFT SIDE

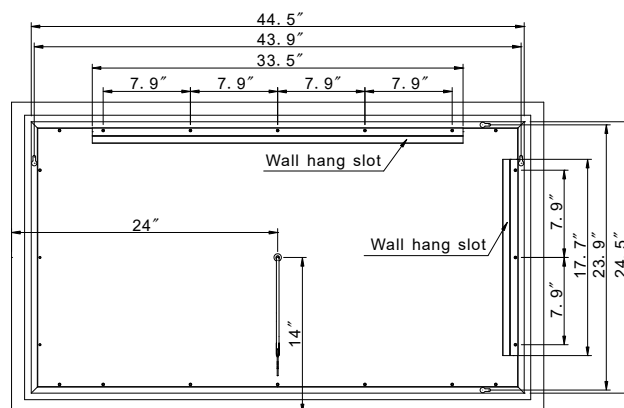


REAR VIEW


FROSTED RECTANGLE BACKLIT 48 X 36

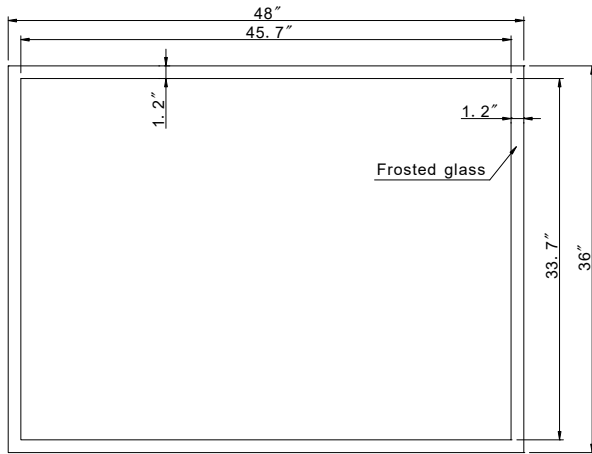

FRONT VIEW

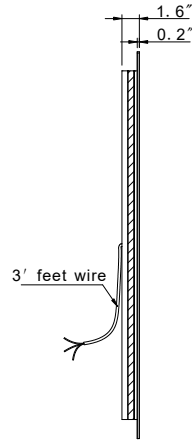


LEFT SIDE

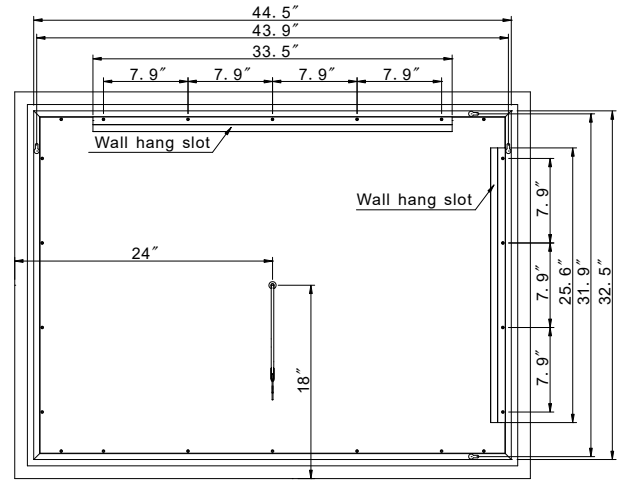


REAR VIEW


FROSTED RECTANGLE BACKLIT 55 X 28

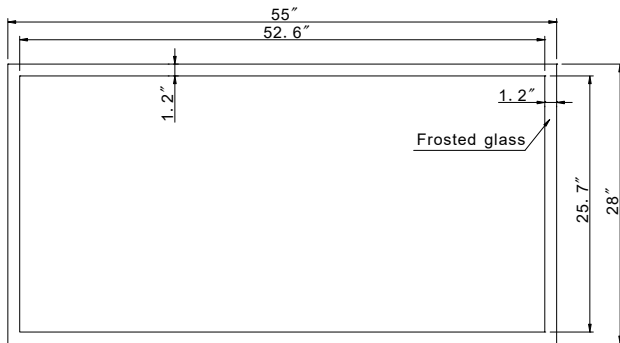

FRONT VIEW




LEFT SIDE

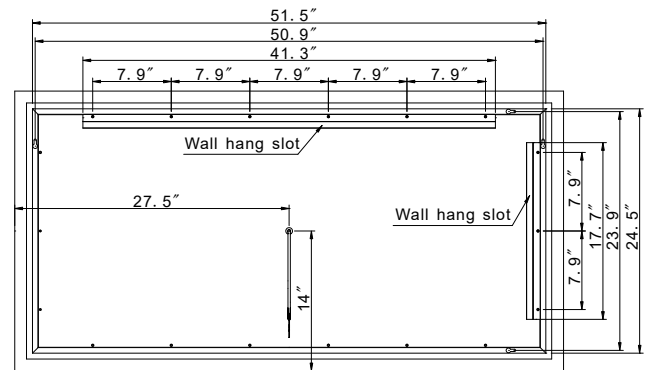


REAR VIEW


FROSTED RECTANGLE BACKLIT 42 X 42

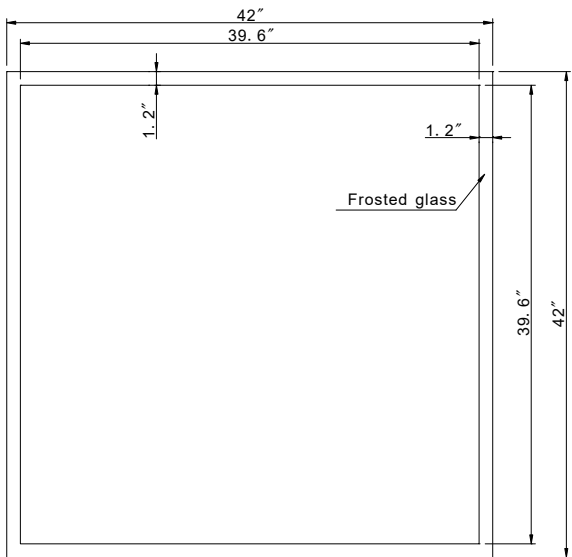

FRONT VIEW

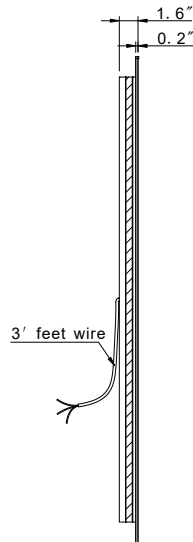


LEFT SIDE

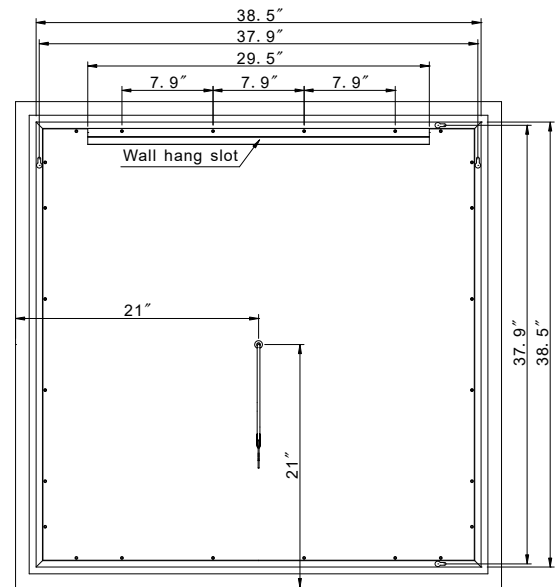


REAR VIEW


FROSTED RECTANGLE BACKLIT 60 X 36

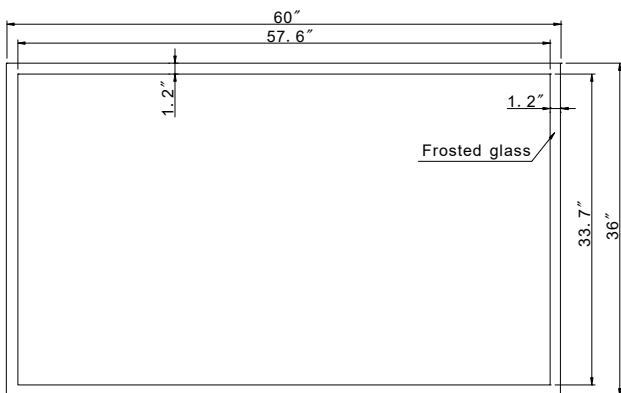

FRONT VIEW

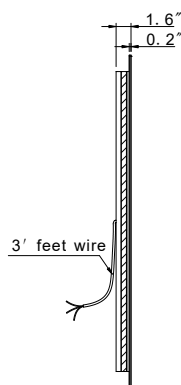


LEFT SIDE

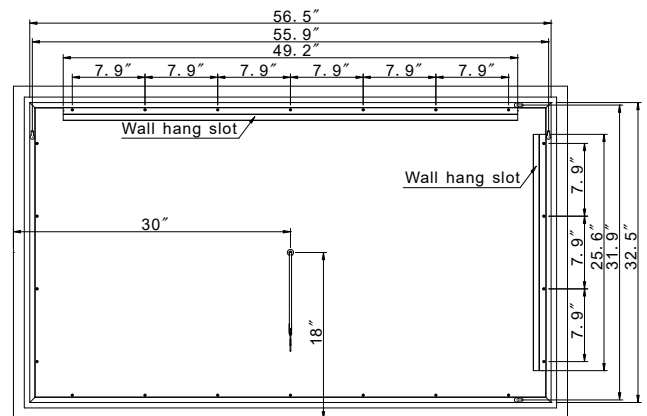


REAR VIEW


FROSTED RECTANGLE BACKLIT 70 X 32

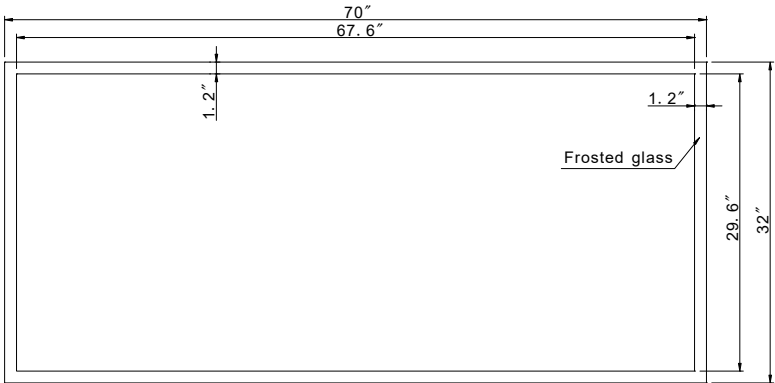

FRONT VIEW

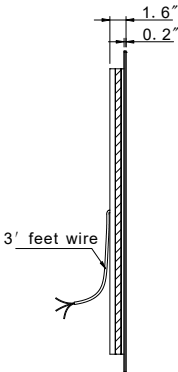


LEFT SIDE

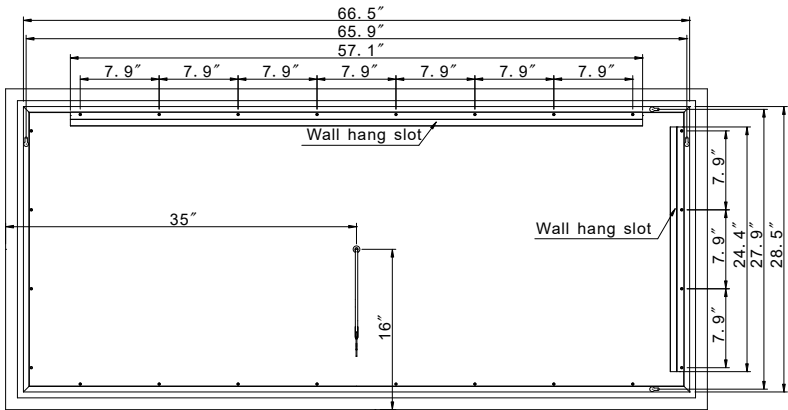


REAR VIEW


FROSTED RECTANGLE BACKLIT 79 X 30

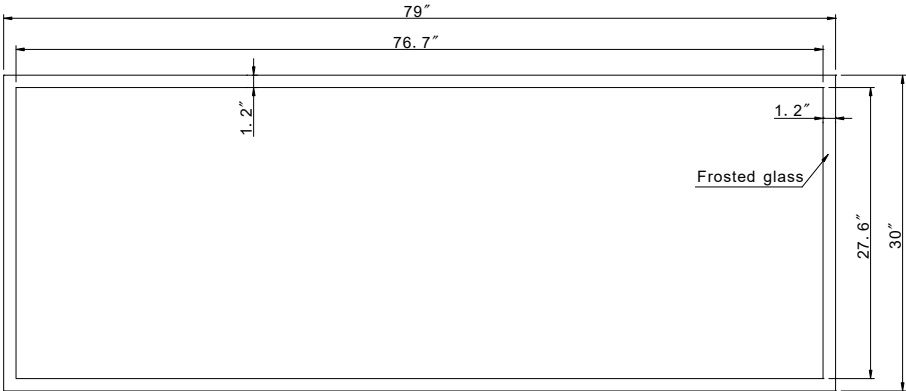

FRONT VIEW

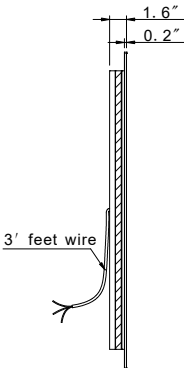


LEFT SIDE

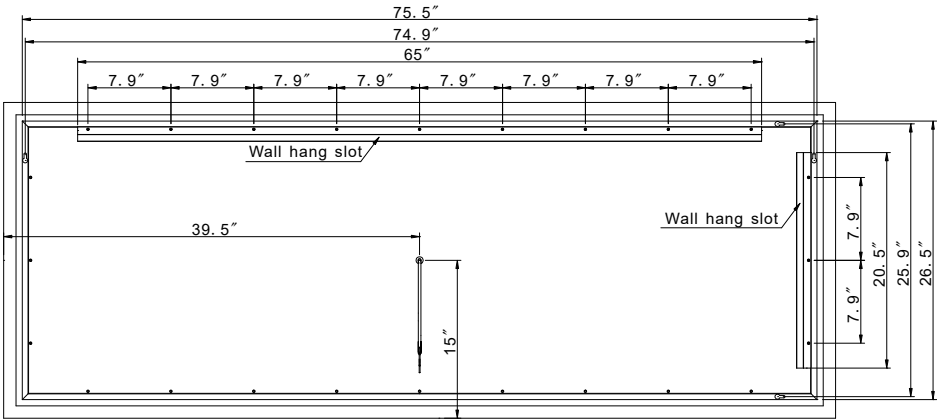


REAR VIEW


FROSTED RECTANGLE BACKLIT 70 X 45

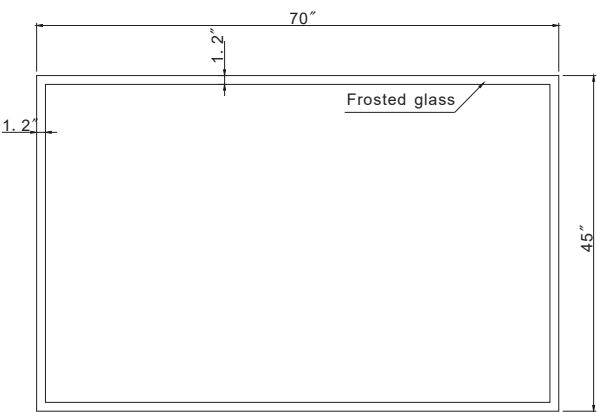

FRONT VIEW

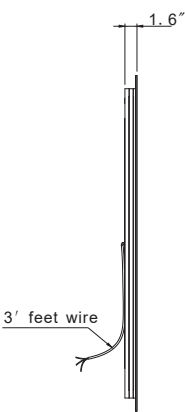


LEFT SIDE

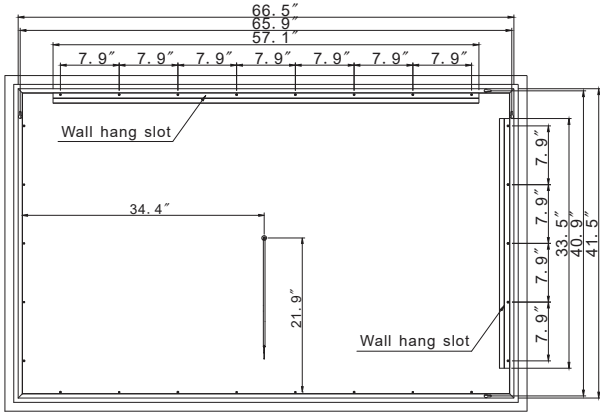


REAR VIEW


FROSTED RECTANGLE BACKLIT 85 X 40

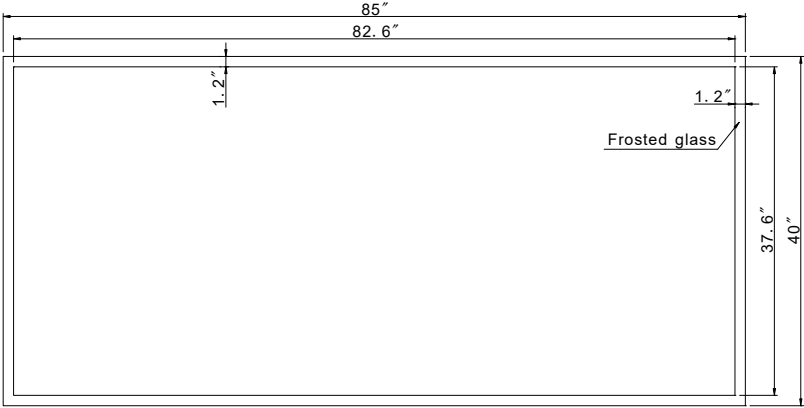

FRONT VIEW

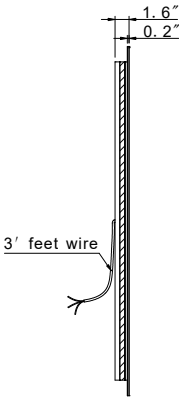


LEFT SIDE

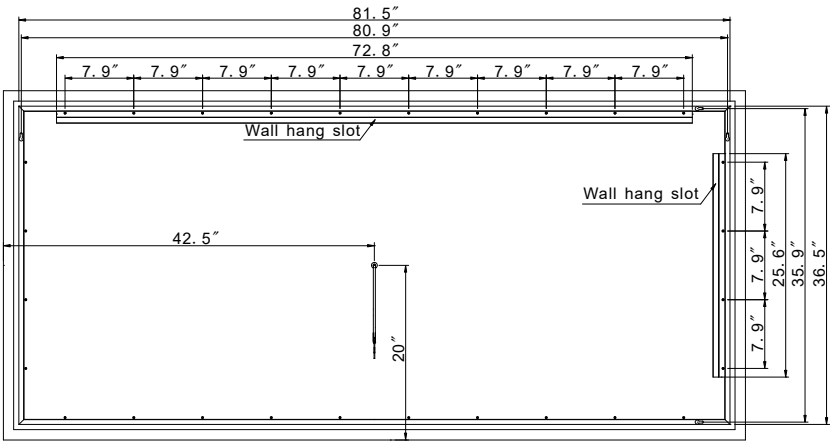


REAR VIEW


FROSTED RECTANGLE BACKLIT 100 X 45

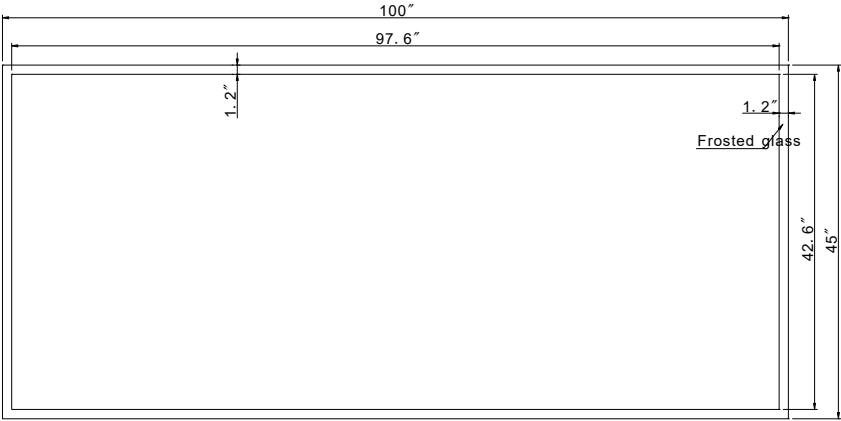

FRONT VIEW



LEFT SIDE

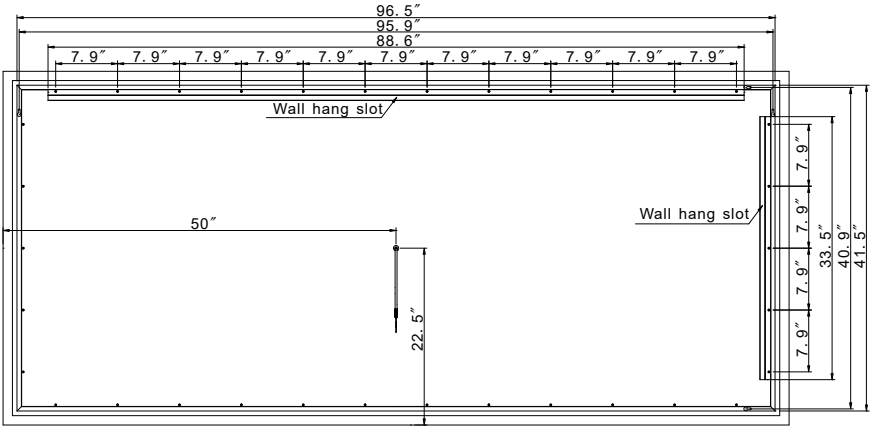

REAR VIEW

## INSTALLATION & AFTER CARE INSTRUCTIONS

### Installation:


- All our LED mirrors have been independently tested for compliance with electrical equipment (safety) regulations.
- All illuminated and backlit mirrors are IP44 rated.
- Illuminated mirrors have been designed and independently tested for compliance to electrical equipment (safety) regulations, and are UL Certified.
- LEDs have a life expectancy of 120,000 hours of continuous use. All LED light fittings are replaceable and are available through our customer service.
- IMPORTANT: Always switch off the electrical supply at the mains during installation and maintenance.
- It is recommended that fuse is withdrawn or circuit breaker switched off before installation begins.
- Fitting in Bathrooms is subject to all regulations. It is not suitable for product installations in Saunas, Steam Rooms, or shower cubicles and it is recommended for permanent installation.

### Care Safety:

- Wear suitable eye wear protection when drilling. Use caution when using power tools near water, beware of hidden cables or pipes.
- Take care if drilling on tiled surfaces in case the drill slips. A piece of masking tape applied to wall before marking out fixing holes will stop drill from moving.

### Cleaning & Maintenance:

- It is recommended that the unit is cleaned with a soft, dry, non-abrasive cloth when turned off.
- Never use cleaning agents or abrasive material on any type of surface finish.
- Do not strike glass components with hard or pointed items.
- Do not place very hot or cold items against or close proximity to glass surfaces.

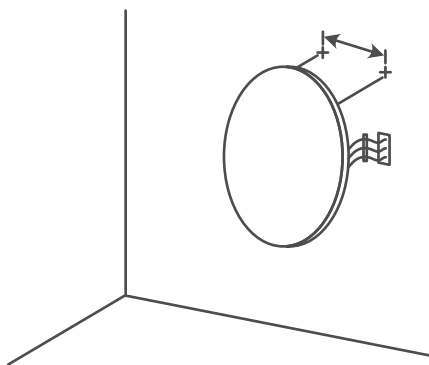

### 120V DIMMABLE LED DRIVER INCLUDED

- 1-Decide on wall positional placement.
- 2-Prepare & install wall hooks measured to distance between mirror's
- 3-Match & attach 3 electrical wires from mirror to home electrical wires: Live to Live, Ground to Ground, Neutral to Neutral.
- 4-Hang and affix to wall.