




DIMENSIONAL DRAWING

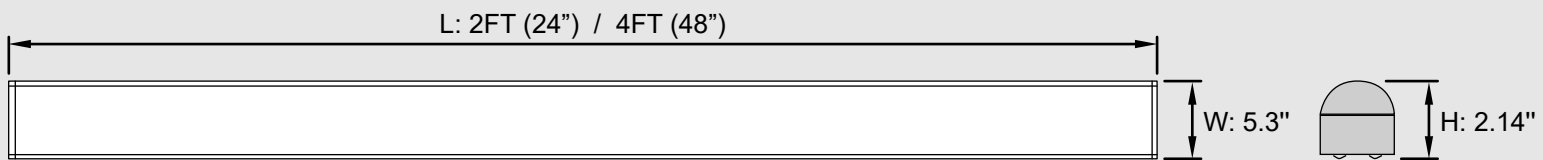

FEATURES

- Slim Design Linear Wrap in 2' and 4' lengths.
- Operating temperature range of $-20^{\circ}\text{C} \sim +40^{\circ}\text{C}$.
- Field Selectable 4 CCT (3000K, 3500K, 4000K & 5000K) along with Auto Sensing 120-347V Driver.
- PMMA opal lens.
- Suitable for Surface, or suspended chain mounting.
- Compatible with 0-10V Dimming, ETL Listed.
- Usable in damp location.
- CRI 80 with 0.9FP

SPECIFICATIONS

Housing :

Slim Profile CRCA Housing with Polycarbonate End Caps.

Optics :

Opal Colour PMMA Diffuser.

Mounting :

Suitable for Surface & Pendent Mounting.

Driver :

Autosensing 120-347V driver, Operating temperature range of $-20^{\circ}\text{C} \sim +40^{\circ}\text{C}$.

LED :

Field Selectable CCT of 3000K, 3500K, 4000K & 5000K.

Controls :

Compatible with 0-10V Dimming, 10% Min.

Optional LV Microwave Motion Sensor.

PRODUCT SPECIFICATIONS

Product code	Wattage (W)	Input Voltage (V)	Hour Rating (L70)	Beam Angle	Initial Delivered Lumens (lumen)	CCT (Kelvin)	CRI
LCWRAP-20W-4CCT-UV-T-2FT	20	120-347V	50,000	100°	2600	30-35-40-50	>80
LCWRAP-40W-4CCT-UV-T-4FT	40	120-347V	50,000	100°	5200	30-35-40-50	>80

POLAR CANDELA

