



# ATF7415

## 15W LED Track Head Track Lighting



\* Only available  
for 3000 K



### Job Information

|              |  |
|--------------|--|
| Project Name |  |
| Type         |  |
| Location     |  |
| Quantity     |  |
| Date         |  |

### Description

The ATF7415 is a 15W high powered, Energy Star® approved LED track fixture specially designed for task and accent lighting. Available black, silver and white finishes.

### Features

#### Body

Constructed of aluminum, the body features an aesthetically pleasing smooth cylindrical shape. The body included a colour matching aluminum heat sink in order to provide maximum heat dissipation.

#### Beam Spread

The fixture is available in a 15°, 20°, 38° and 60° beam angles.

#### Dimming

The track fixture is dimmable when used with TRIAC dimming controls (Consult factory for compatible dimmers).

#### Adjustability

Adjustable up to 90° tilt and 330° rotation to allow for spotlight into multiple directions.

#### LED Characteristics

High powered 15W CREE® CXA1512 LED array maintains uniform intensity with a typical luminous flux up to 1400 lumens, making it a suitable replacement for 55W PAR38 halogen and 22W PAR20 CMH lamps; with a CRI of 80 and 90. Available in 3000 K, 3500 K and 4000 K correlated color temperature.

#### Compatibility

Fixture is provided with A-Line connector which is compatible with Juno style track. For other connector configurations (Halo, Liteline), please contact your A-Line representative.

#### QuickShip In-Stock


In-Stock products ship within two business days of an order being released.\*



### SPECIFICATION

|                   |                          |
|-------------------|--------------------------|
| Application       | Track                    |
| Approved Location | Dry                      |
| Beam Angle        | 15° / 20° / 38° / 60°    |
| CBCP              | 2853                     |
| CCT               | 3000 K / 3500 K / 4000 K |
| Certification     | cULus                    |
| Colour            | BK / WH                  |
| CRI               | 80 / 90                  |
| Dimming           | Yes                      |
| Dimming Tech      | TRIAC/ELV                |
| Energy Star®      | Yes                      |
| LM79              | Yes                      |
| LM80              | Yes                      |
| Lumen Maintenance | 70% @ 50,000 Hrs         |
| Lumens            | 1160 / 1160 / 1240       |
| Lumens (90CRI)    | 1400 (only 3000 K)       |
| Lumens per Watt   | 77.3 / 77.3 / 82.6       |
| Primary Voltage   | 120                      |
| Rotation          | 330°                     |
| Tilt              | 90°                      |
| Warranty          | 5 Years                  |
| Wattage           | 15                       |

### Technical Drawings

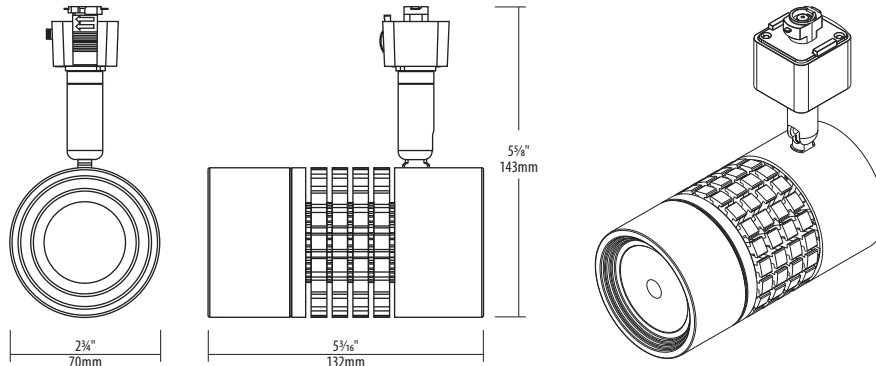

### Ordering Guide

| Connector Type |             | Color Temp.                               | Beam Spread                                  | CRI                                      | Finish Color             |
|----------------|-------------|-------------------------------------------|----------------------------------------------|------------------------------------------|--------------------------|
|                | - ATF7415 - |                                           |                                              |                                          |                          |
|                |             | 30 : 3000 K<br>35 : 3500 K<br>40 : 4000 K | 38 : 38°<br>15 : 15°<br>20 : 20°<br>60 : 60° | Blank : 80CRI<br>90 : 90CRI <sup>1</sup> | BK : Black<br>WH : White |



Blank : A-Line or Juno (ATK Track)  
H : Halo  
LL : Liteline (TK Track)

QUICKSHIP  
(2-DAY)

Highlighted  
option  
denotes  
QuickShip.

### Accessories



#### ATF7415-HC

Honeycomb accessory for ATF7415 series. Available in black or white body.



#### ATF7415-SN

Snoot accessory for ATF7415 series. Available in black or white body.

\* QuickShip option is available on orders of 100 pieces or less. QuickShip lead time may vary for orders greater than 100 pieces. No additional shipment rates apply. Subject to availability.

**Notes:** For additional options please consult your A-Line Lighting representative. Juno is a registered trademark of Juno Lighting Group. Halo is a registered trademark of Cooper Lighting. Due to our continued efforts to improve our products, product specifications are subject to change without notice.

Liteline Corporation  
Copyright © 2024  
All rights reserved.

Telephone  
416.996.1856  
1.866.730.7704

Fax  
905.709.5255  
1.888.738.9736

LITELINE.COM

REV 9.10.24

ATF7415-3038 : LED TRACK HEAD, 15W, 3000 K, 38° Beam Spread

Zonal Lumen Summary

| Zone   | Lumens  | % Luminaire |
|--------|---------|-------------|
| 0-30   | 972.8   | 84%         |
| 0-40   | 1,079.6 | 93.2%       |
| 0-60   | 1,141.9 | 98.6%       |
| 60-90  | 16.3    | 1.4%        |
| 70-100 | 4.8     | 0.4%        |
| 90-120 | 0       | 0%          |
| 0-90   | 1,158.2 | 100%        |
| 90-180 | 0.0     | 0%          |
| 0-180  | 1,158.2 | 100%        |

