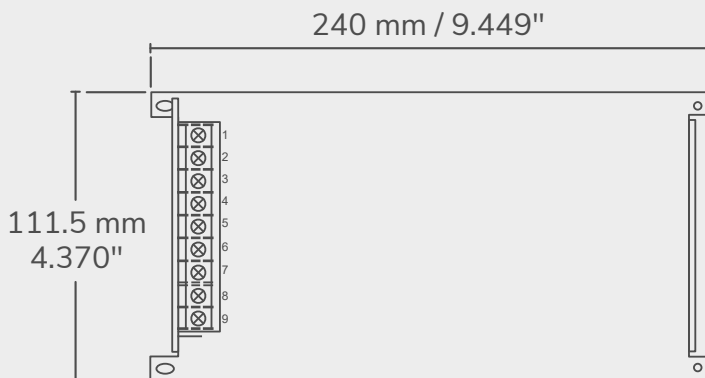


### FEATURES

- Available in 24V
- Protections: short circuit / Overload / Over temperature
- Cooling by free air convection
- 100% full load burn-in test
- Suitable for LED lighting
- Products through CE, ETL RoHS Certification
- Class 2 LED driver
- 3 Years warranty
- Output constant voltage
- AC input: 100~240VAC
- High efficiency > 83%
- Dimensions : 240 x 111.5 x 65mm (L x W x H)
- Weight : 1.450Kg/pcs

## TECHNICAL SPECIFICATIONS

| Model       |                    | LCPSLCO-HW-24V-500W                                                         |
|-------------|--------------------|-----------------------------------------------------------------------------|
| Output      | DC Voltage         | 24V                                                                         |
|             | Voltage Tolerance  | ±0.5V                                                                       |
|             | Rated current      | 7.39A                                                                       |
|             | Rated power        | 500W                                                                        |
| Input       | Voltage Range      | 100 ~ 265VAC                                                                |
|             | Frequency Range    | 40 ~ 60HZ                                                                   |
|             | Efficiency (Typ.)  | >83%                                                                        |
|             | AC Current (Typ.)  | 7.39±0.002A                                                                 |
| Protection  | Short Circuit      | Hiccup mode, recovers automatically after fault condition is removed        |
|             | Overload           | overcurrent, overvoltage, overheat, short circuit protection: Auto-recovery |
|             | Over temperature   | Protection type: Shut down o/p voltage, re-power on to removed              |
| Environment | Working TEMP.      | -25 ~ +55°C                                                                 |
|             | Ingress Protection | IP20                                                                        |
| Safety& EMC | Safety standards   | GB195110.1-2004/IEC61347-1:2003 ETL ,CE(EMC+LVD) certificate                |
|             | EMC Test Standards | EN55015, EN61000, EN61547                                                   |
| Others      | Net. Weight        | 1.450Kg                                                                     |
|             | Size               | 240 x 111.5 x 65mm (L x W x H)                                              |