



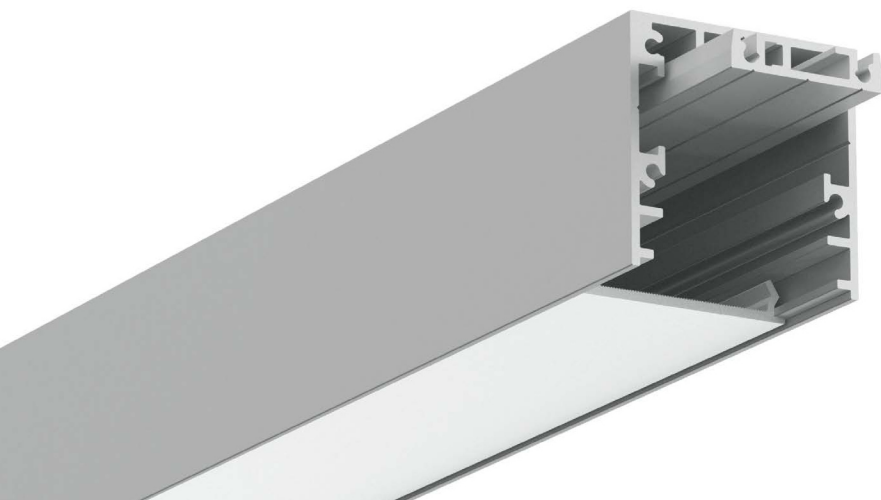


## TECHNICAL DRAWING

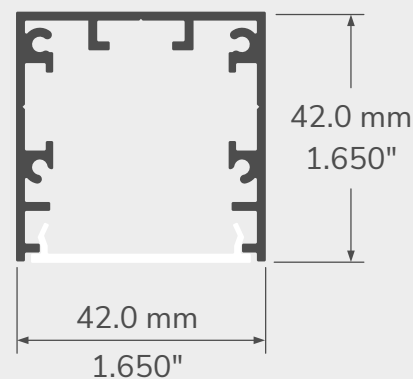




## A WIDE CHOICE OF OPTICS

This new profile design will offer you a wide choice of optics, thanks to the development of various lens that will allow you to customize the light projection angle. In addition, its unique hardware will allow you to adjust the direction of your fixture to your needs, even after installation is complete.

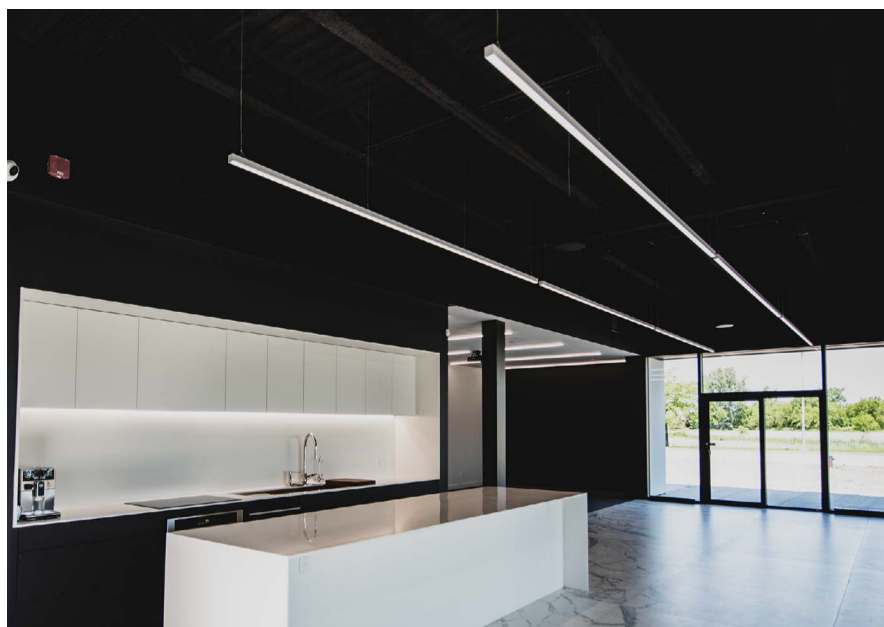

## FEATURES

- Hardware specially developed to allow you to rotate the luminaire and guide the light source according to the circumstances.
- Can be used with a concave diffuser designed to hide the light source while maintaining the profile to the foreground.
- The combination of various lenses will offer a lighting distribution customized to your needs.
- Straight and clean lines will give a modern look to your decor.
- Optics available: Prime, Optiflex & concave diffuser.
- Designed to meet North American woodworking standards.

| PROFILE                                                                                                                                                                                                                     | LENSES                                                                                                          | MOUNTING HARDWARE                                                                                                                                                                                                                                          | SUSPENSION / RECESS                                                                                                                                                                                                                                        | OPTION                                                                                                                                               | LENGTH                                          |
|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------|
| <br>8800 - Profile, Alu                                                                                                                    | <br>PR - Prime flat lens       | <br>SW - Swivel bracket kit                                                                                                                                               | <p>NOTE: Canopies only available with SUS bracket (suspension)</p> <br>Remotedriver canopy plate<br>See Appendix 2 on page 260<br>CR0 - Alu<br>CR1 - Black<br>CR2 - White | <br>HER- High efficiency reflector, single channel - 1LEDengine   | Custom length by sections of 2 to 240"          |
| <br>8801- Profile, Black                                                                                                                   | <br>OX- Optiflex flat lens     | <br>Type B dbl. chann. susp. kit with 15ft. aircraft cable<br>SUS- 8800 suspension kit                                                                                    | <br>Integrated driver in canopy<br>See Appendix 2 on page 260<br>C10 - Alu<br>C11 - Black<br>C12 - White                                                                  | <br>HER2- High efficiency reflector, double channel - 2LEDengines | Maximum length using Loop Swivel Brackets = 96" |
| <br>8802- Profile, White                                                                                                                   | <br>OP- Opal flat lens         | <br>Loop swivel bracket<br>SWRD - Red<br>SWPK - Pink<br>SWCY - Cyan<br>SWBK - Black<br>SWBL - Blue<br>SWWH - White<br>SWGR - Green<br>SWTR - Transparent<br>SWOR - Orange | <br>Integrated driver & suspension kit<br>See Appendix 2 on page 260<br>CIK0 - Alu<br>CIK1 - Black<br>CIK2 - White                                                        |                                                                                                                                                      |                                                 |
| <br>880X - Profile, Customcolor                                                                                                            | <br>OXC- Optiflex concave lens |                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                            |                                                                                                                                                      |                                                 |
| <br>CH900-8800corner 90°, 6x6", alu.<br>Joiners to be ordered separately     | <br>BK - Black lens            |                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                            |                                                                                                                                                      |                                                 |
| <br>CH901-8800corner 90°, 6x6", black<br>Joiners to be ordered separately |                                                                                                                 |                                                                                                                                                                                                                                                            |                                                                                                                                                                                                                                                            |                                                                                                                                                      |                                                 |
| <br>JS- Type B straight joiner                                                                                                           |                                                                                                                 |                                                                                                                                                                                                                                                            | <br>Gypsum groove 1/2", 4"<br>See page 196 for details<br>G8800                                            |                                                                                                                                                      |                                                 |

