




**TECHNICAL DRAWING**

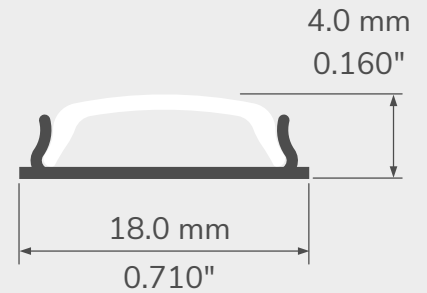

**INSTALLS ON CURVED OR UNEVEN SURFACES!**

The 556 profile allows integrating linear LED lighting on curved or uneven surfaces. Its low profile (1/5" including lens), and a thickness of less than 1/32" (0.75mm), allows for effortless bending and installation using plain mounting tape.



**FEATURES**

- Custom length by sections of 96 inches (2.44m).
- Thin, lightweight and flexible, can be easily bent over curved or uneven surfaces.
- Can be installed using adhesives/mounting tape.
- Made of ALCOA 6063-T5 aluminum alloy, increasing heat dissipation and the lifetime of your
- LED engine.
- Designed to meet North American woodworking standards.

PROFILE



5560 - 5560 Profile, alu

LENSES



OP - Opal lens

MOUNTING HARDWARE



3M - Mounting tape, double face

LENGTH

Custom length by sections of 2 to 96 inches (2.44m).