

# **UNI1190**

# UNIVERSAL Line Voltage Track Fixture for PAR Lamps

Track Systems

Job Information		
Project Name		Туре
Location		
Quantity		Date
Contact/Phone		
Notes		

# **Features**

## **Body**

Constructed of die cast aluminum which provides superior strength and rigidity. Softened edges adds up to the low profile aesthetic design.

#### Lamping

Porcelain socket for 120V PAR lamps, 150 watts max E26 base. A high temperature glass shield is included, mounted to front of lamp fixture.

### **Adjustability**

Fixture provides vertical rotation of 180° and horizontal rotation of 358°; providing a wide range of light source aiming possibilities.

# **Dimming**

The track fixture is dimmable when used with electronic line voltage rated dimming controls only. 120V / 60Hz input; 120V output; 150W maximum load.

# Compatibility

Liteline track fixtures are compatible with A-Line, Halo®, Lightolier® and most brands configured to Halo® track system design.


#### Labels

• ETL listed.



# **Description**

The UNIVERSAL is a line voltage aluminum cylinder fixture for PAR light source. UNIVERSAL is a front loading track fixture which provides directional light source for special aiming and assures secure lock on angle position.



# **Connector Compatibility Chart**



Style



Style



Style



Style




#### Interte

**Notes:** Accessories should be ordered separately. For additional options please consult your Liteline representative. Juno is a registered trademark of Juno Lighting Group. Halo is a registered trademark of Cooper Lighting. Lightolier is a registered trademark of Cooper Lighting.

Due to our continued efforts to improve our products, product specifications are subject to change without notice.

# **Ordering Guide**

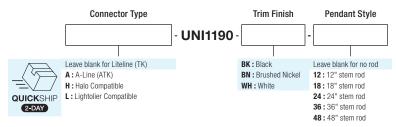

<sup>\*</sup> QuickShip lead time may vary for orders greater than 100 pieces. No additional shipment rates apply. Subject to availability

