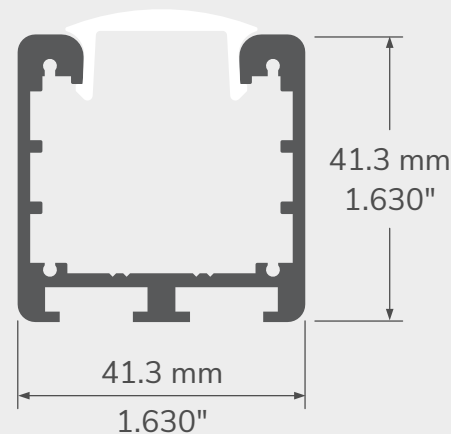


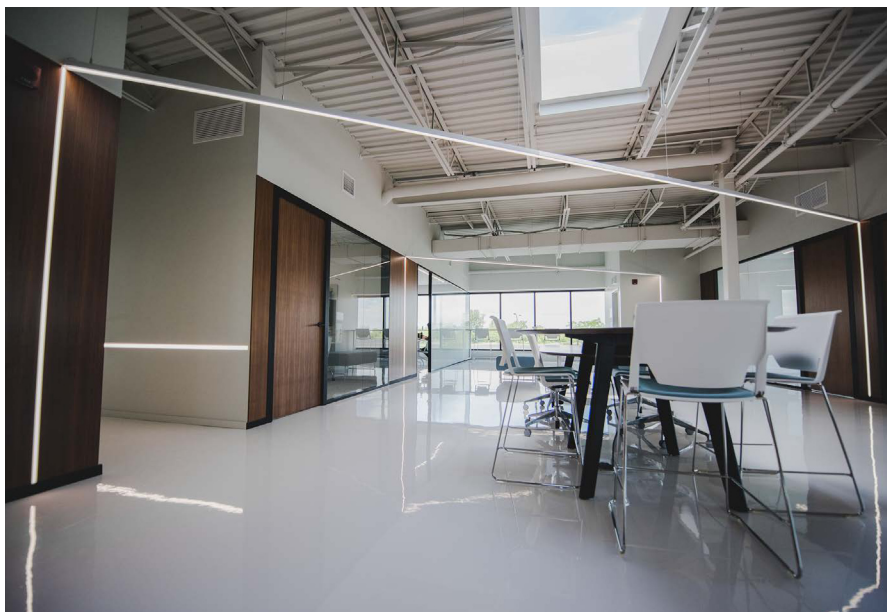


TECHNICAL DRAWING






A STURDY ALUMINUM PROFILE

The 94 profile with its twin mounting channels allows for a wide range of installation options. Whether on swivel arms, on a surface, or suspended, it can be built in complex spatial configurations using corner joiners. Its rugged build in 6063-T5 aluminum alloy will withstand abuse in demanding applications and extreme weather, all of it with an understated elegance.



FEATURES

- The ALCOA 6063-T5 aluminum alloy increases heat dissipation, for an extended lifetime of the LED source, and is suitable for outdoor installation.
- Custom length by sections of 2 to 240 inches (6m).
- 3 position slots for the LED heat sink insert for setting the needed beam angle.
- Accepts multiple or oversized LED sources on a 33mm (1.25in) wide area, for extra power. Has application guides for 10mm (3/8-inch) wide LED engines.
- Designed to give a uniform light without hot spots.
- Its mounting channels make it compatible with a wide range of installation accessories.

PROFILE	LENSES	MOUNTING HARDWARE	CANOPY	OPTION	LENGTH
 94 - Profile, Alu  94BK - Profile, Black  94WH - Profile, White  94CS - 94 Profile, custom color	 CL - Clear lens  OX - Optiflex lens  OP - Opal Lens  PR - Prime Lens  FO - Focus lens  NO - No lens	 CLIP - Clip-in Bracket  Surface 2-side bracket S20 - Alu S21 - Black S22 - White  Surface 1-side bracket S10 - Alu S11 - Black S12 - White  Surface 90-deg. bracket S30 - Alu S31 - Black S32 - White  Swivel wall bracket SW0 - Alu SW1 - Black SW2 - White  Swivel sign arm, 6" offset SA60 - Alu SA61 - Black SA62 - White  Swivel sign arm, 18" offset SA180 - Alu SA181 - Black SA182 - White  Type B dbl. chann. susp. kit with 15ft. aircraft cable SUS0 - Alu SUS1 - Black SUS2 - White	NOTE: Only available with SUS bracket (suspension)  Remote driver canopy plate CR0 - Alu CR1 - Black CR2 - White  Integrated driver in canopy CI0 - Alu CI1 - Black CI2 - White  Integrated driver & suspension kit CIK0 - Alu CIK1 - Black CIK2 - White	 HER - High efficiency reflector  NO - No option	Custom length by sections of 6 to 240 inches (6m).
RAL NUMBER  94 corner 90°, 6x6" <i>Joiners to be ordered separately</i> CH900-94 corner 90°, 6x6", alu CH901-94 corner 90°, 6x6", black CH902-94 corner 90°, 6x6", white  94 corner 135°, 6x6" <i>Joiners to be ordered separately</i> CH1350-94 corner 135°, 6x6", alu  Joiners JS - Type B straight joiner	QTY QTY QTY QTY				

